



## TEXTRO ELECTRONICS

(TECHNOLOGY FOR LIFE)

20, Mahalakshmi Temple Street,  
Neelikonampalyam, Coimbatore, Tamil Nadu  
641033

TEXTRO ELECTRONICS STARTED AS A HOME GROWN MANUFACTURING ORGANIZATION, NEEDS OF DOMESTIC ENGINEERING, TEXTILE, ELECTRICAL AND ELECTRONIC INDUSTRIES IN COIMBATORE AND GROWN RAPIDLY IN THE SPACE. TEXTRO ELECTRONICS IS PROUD TO HAVE PIONEERED IN MANUFACTURING OF DC DRIVES AND AC DRIVES IN INDIA WAY BACK 2005.

THE COMPANY WAS CERTIFIED UNDER TUV SUD SOUTH ASIA ISO IAS MSCB-119 QUALITY MANAGEMENT SYSTEMS. THE MAJOR PRODUCTS OF OUR COMPANY ARE AC DRIVES, DC DRIVES, DIGITAL UNITS, AND PANELS.

### SAFETY INFORMATION

**FAILURE OR IMPROPER SELECTION OR IMPROPER USE OF THE PRODUCTS DESCRIBED HEREIN OR RELATED ITEMS CAN CAUSE DEATH, PERSONAL INJURY AND PROPERTY DAMAGE.**

#### DANGER! - Ignoring the following may result in injury

This equipment can endanger life by exposure to rotating machinery and high voltages.

2. The equipment must be permanently earthed due to the high earth leakage current, and the drive motor must be connected to an appropriate safety earth.

3. Ensure all incoming supplies are isolated before working

on the equipment. Be aware that there may be more than one supply connection to the drive.

4. There may still be dangerous voltages present at power terminals (motor output, supply input phases, DC bus and the brake, where fitted) when the motor is at standstill or is stopped.

5. For measurements use only a meter to IEC 61010 (CAT III or higher)

6. Allow at least 10 minutes for the drive's capacitors to discharge to safe voltage levels. Use the specified meter capable of measuring up to 1000V dc & ac rms to confirm that less than 50V is present between all power terminals and between power terminals and earth.

7. Unless otherwise stated, this product must NOT be dismantled. In the event of a fault the drive must be returned. Refer to "Routine Maintenance and Repair"


**NOTE: 2HP BASEPLATE WAS IN ENCLOSURE (BOX) TYPE.**

### FEATURES:


#### 2HP BASE PLATE DRIVE:

- ❖ Input: 230V AC, 50 HZ
- ❖ Output: Armature voltage - 0 - 220VDC
- ❖ Field voltage - 220VDC
- ❖ HP : 0.5 HP – 2 HP
- ❖ Current limit : 1A – 8 A
- ❖ Acceleration/De-acceleration time adjustable.
- ❖ Max and min speed limits.
- ❖ Armature and Tacho feedback.
- ❖ Easy installation and service
- ❖ Available in customized input and output voltages.

### CONNECTON DETAILS:

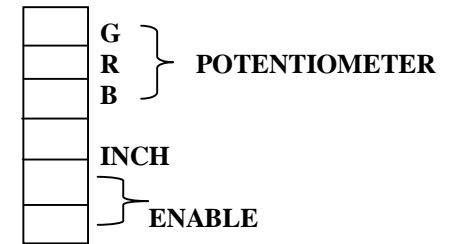

### POWER CONNECTION:

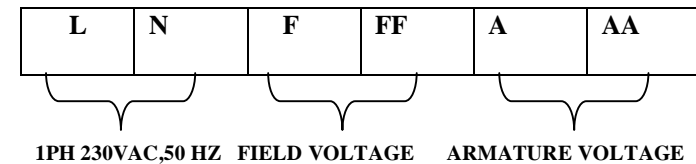

### FACTORS TO BE CONSIDERD:

#### Before installing the drive

- From motor side check the armature coil ohms the range should be around 0.1 ohm to 5 ohm.
- Check the field coil ohms the range should be around 50 ohm to 600 ohm.
- Confirm that, the field and armature should not be shorted with the body.
- From drive side Confirm that, the enable is at closed condition. Confirm that, the Potentiomete is connected at the Potentiometer terminal.
- Connect the lamps at the field and armature terminals respectively.
- For single phase, connect around 100w bulb at field

and armature terminals.

- The lamp which is connected at the field terminal should glow continuously.
- The lamp which is connected at the armature terminal should glow by varying the Potentiometer without any flickering. Now the drive is ready to connect with the motor. Remove the lamps and connect the field of the motor to the field terminal and armature of the motor to the armature terminal

### POTENTIOMETERS DETAILS IN DRIVE:

- MAX** → To set the maximum Voltage.
- MIN** → Minimum voltage at which the motor runs without using main Potentiometer refer
- ACC** → Time taken by the motor to reach the Maximum voltage.
- DCC** → Motor OFF time (voltage to the motor is minimum i.e. zero).
- INCH** → To set the constant output (it can be varied).
- CLM** → Over current trip set

### APPLICATION:

- ❖ Printing Industries
- ❖ Lathe Machine
- ❖ Rubber Industries
- ❖ Pet Bottle Making Machinery
- ❖ Conveyor
- ❖ Ball Throwing Machines
- ❖ Fasteners machines

- ❖ Extruders machines
- ❖ Used For Customized Application

### 2HP BASE PLATE DRIVE



### ENCLOSURE TYPE:



Refer to Tetro Electronics Manufacturing Limited Terms and Conditions of Sale. These documents are available on request at [www.tetroelectronics.com](http://www.tetroelectronics.com). Tetro Electronics Manufacturing Limited reserves the right to change the content and product specification or dimensions in the datasheet without notice